

Main Features

- Excellent repeatability
- Dead band adjustment for regulation
- Fix dead band for control and alarm
- Capillary 1 to 20 meters

Applications

- Power generation safety equipment



Technical Data

Temperature range	-46 ... 0 °C to 200 ... 270 °C		Ground connection	Via internal terminal block
Temperature	Process:	-46 ... +270 °C	Electrical connection	Terminal block with plastic cable gland for Ø 7 to 10.5 mm
	Ambient:	-30 ... + 55 °C	Electrical function	See ordering code details on page 5
	Storage:	-40 ... + 55 °C	Adjustment	2 external adjustment screws on top of the case for set point and dead band
Repeatability	± 1% F.S. / constant temperature cycle			
CE conformity	Low Voltage Directive 2014/35/EU			
Protection rating	IP 66 (EN 60529)			
Process connection	Stainless steel 1.4404 (316L)			
Bulb	Stainless steel 1.4435/1.4404 (316L)			
Capillary	RTA: Copper alloy RTN: Stainless steel 1.4404 (316L) For types of protection see ordering details on page 5			
Scale	Internal. Accuracy on reading ± 5% F.S.			
Cover	Zamak blue painted Captive stainless steel screws			
Case	Black Zamak			
Mounting	Wall mounting bracket			


Options

Customer specific set point adjustment	Code SETP
Mounting on 2" pipe	Code 0407
Stainless steel tag plate and wire	Code 9941
Lead seal of the adjustment screws	Code 8990
Nuclear cleanliness (RTN only)	Code 0838
Electrical connection: stainless steel connector (Souriau)	Code 2298
Mobile plug for stainless steel connector (Souriau)	Code 2249

Principle

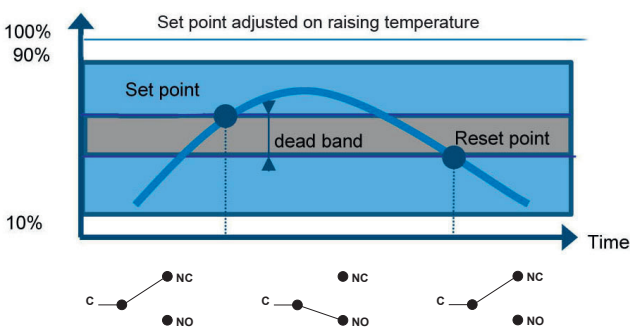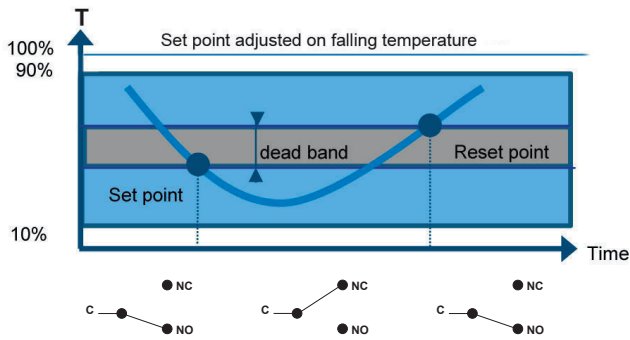

A vapour filled flexible sensing element actuates a microswitch by means of a lever. The set point is adjusted by means of a compressible spring installed in opposition.

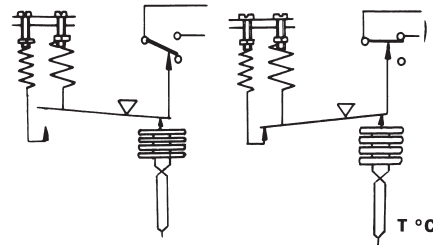

Set point and reset point must be between 10% and 90% of the selected scale.

Standard factory adjustment

Setpoint at 50% of the scale on falling temperature


Customer specific factory adjustment (option SETP)

The following specifications have to be given with the order:


- Setpoint value
- Adjustment on falling or raising temperature
- Dead band value (as needed) when using an adjustable dead band switch

Electrical connections

1 SPDT



2 SPDT

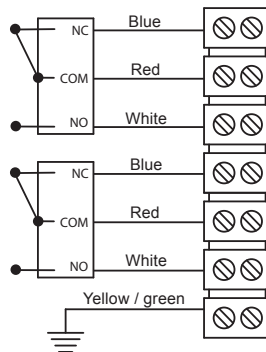

Micro switches characteristics

Switch code	A (B)	M (K)	C (W)	E (F)	H	D (V)	J
Type	Standard	Gold contact	Hermetic	Ultra sensitive	Manual reset	Ultra sensitive Hermetic	Manual reset
6 Vdc	0.4 ... 10 A	10 ... 50 mA	5 mA ... 4 A	0.4 ... 1 A	N/A	0.4 ... 4 A	N/A
12 Vdc	0.4 ... 10 A	10 ... 50 mA	5 mA ... 4 A	0.4 ... 1 A	N/A	0.4 ... 4 A	N/A
24 Vdc	0.4 ... 6 A	10 ... 50 mA	5 mA ... 4 A	0.4 ... 1 A	0.1 ... 8 A	0.4 ... 4 A	0.1 ... 8 A
30 Vdc	0.4 ... 6 A	10 ... 50 mA	5 mA ... 3 A	0.4 ... 1 A	0.1 ... 8 A	0.4 ... 2 A	0.1 ... 8 A
48 Vdc	0.4 ... 6 A	10 ... 50 mA	5 mA ... 3 A	N/A	N/A	N/A	N/A
110 Vdc	0.1 ... 0.5 A	10 ... 50 mA	5 mA ... 1 A	N/A	N/A	N/A	N/A
220 Vdc	0.1 ... 0.25 A	10 ... 50 mA	5 mA ... 0.5 A	N/A	N/A	N/A	N/A
115 Vac	0.4 ... 10 A	10 ... 50 mA	50 mA ... 3 A	0.4 ... 10 A	0.1 ... 10 A	N/A	0.1 ... 10 A
250 Vac	0.2 ... 10 A	N/A	50 mA ... 2.5 A	0.2 ... 10 A	0.1 ... 5 A	N/A	0.1 ... 5 A
Dielectric rigidity between contacts and ground	2000 V	2000 V	1500 V	2000 V	2000 V	1000 V	2000 V

Adjustable ranges



Scale	T _{Max} accidental	Code	Micro-switch dead band ⁽¹⁾									
			Adjustable dead band				Fixed dead band					
			A (B*)		M (K*)	C (W*)		E (F*)		H	D (V*)	J
			10%	90%	10%	90%	10%	90%	10%	90%		
°C			°C									
-46 ... 0	40	400	4 - 9	2 - 9	8 - 12	4 - 12	1.5	0.8	5	2.5		
-20 ... 20	60	401	3 - 8	1.5 - 6	6 - 10	4 - 10	1	0.5	4	2		
0 ... 45	60	402	4 - 9	2 - 9	7 - 12	4 - 12	1.5	0.7	5	2.5		
40 ... 120	145	403	5 - 16	3 - 16	10 - 20	6 - 20	2	1.2	6	4		
100 ... 160	180	414	5 - 12	3 - 12	9 - 15	5 - 15	2	1	6	3		
20 ... 80	100	415	5 - 12	3 - 12	9 - 15	5 - 15	2	1	6	3		
160 ... 250	290	406	6 - 18	4 - 18	11 - 22	7 - 22	2.5	1.2	8	4.5		
70 ... 150	175	408	5 - 16	4 - 16	10 - 20	6 - 20	2	1	6	4		
130 ... 190	210	412	5 - 12	3 - 12	9 - 15	5 - 15	2	1	6	3		
200 ... 270	290	413	5 - 12	3 - 12	9 - 15	5 - 15	2	1	6	3		

(*) For version with 2 microswitches lower values of the dead band must be multiplied x 1.5

⁽¹⁾ The value of the dead band is depending on the value of the set point.

This table contains the dead band values for set point adjustment at 10% and 90% of the selected scale. For adjustable dead band the lower value corresponds to the dead band spring totally released and the higher corresponds to the dead band spring fully tensed. For other set points the dead band value can be calculated by linear interpolation between the values at 10% and 90%.

Dimensions (mm)

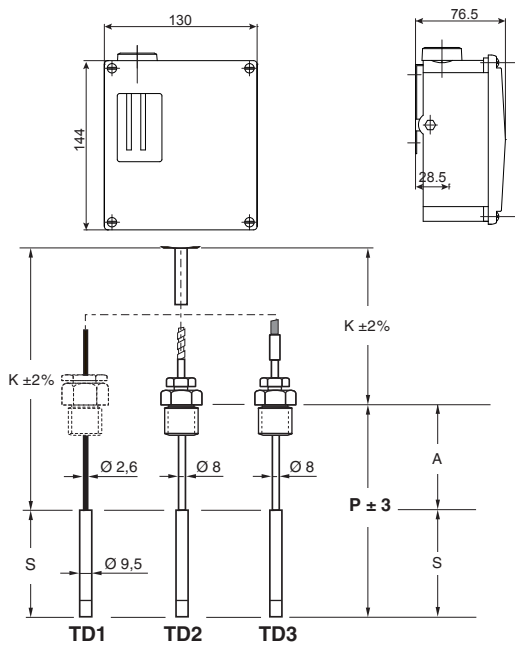


- S** = Bulb length (temperature sensitive part, see tables below)
- A** = Additional stem length
For versions TD2/3, $A_{min} = 25$ mm
For version TD1 there is no additional stem length ($A=0$).
The sliding connection is mounted on the capillary.
- P** = Immersion length ($P = S + A$)
- P_{min}** = Minimum immersion length ($P_{min} = S + A_{min}$)
- K** = Capillary length

Bulb length (S) according to the capillary length (K) and the temperature range (code)

Bulb Ø 14 mm	Code	400	401	402	403	406	408	412	413	414	415
K = 0 ... 2 m	S / mm	80	80	80	80	80	80	80	80	80	80
K = 3 ... 7 m	S / mm	100	100	100	100	100	100	100	100	100	100
K = 8 ... 16 m	S / mm	150	150	150	150	150	150	150	150	150	150
K = 17 ... 20 m	S / mm	180	180	180	180	180	180	180	–	180	180

Bulb Ø 9.5 mm	Code	400	401	402	403	406	408	412	413	414	415
K = 0 ... 2 m	S / mm	155	155	155	155	155	155	155	155	155	155
K = 3 ... 7 m	S / mm	200	200	200	200	200	200	200	200	200	200
K = 8 ... 16 m	S / mm	300	300	300	300	300	300	300	300	300	300
K = 17 ... 20 m	S / mm	370	370	370	370	370	370	370	–	370	370


Stainless steel sliding male connection (TD1)



Thread and sizes		
F	G 1/2	1/2 NPT
H	18	21
L	43	46
A	27/flat	27/flat
B	27/flat	27/flat

Waterproof after tightening mounted on the capillary.

Stainless steel sliding male connection (TD2/3)



Thread and sizes		
F	G 1/2	1/2 NPT
H	18	21
L	36	40
A	17/flat	17/flat
B	23/flat	23/flat

After tightening of the clamping nut, the stem is fixed in the process connection. Tight up to 40 bar.

Ordering details RTNA4 - RTAA4

	RT	-	A	.	4xx	.	/
Model	RT						
Industrial temperature switch							
Type of the bulb							
Stainless steel bulb and Copper alloy capillary			A				
Stainless steel bulb and capillary			N				
Approval							
Standard version without ATEX/IECEX approval			A				
Type of micro switches							
Deadband							
1 SPDT standard changeover switch			Adjustable	A			
2 SPDT standard changeover switch			Adjustable	B			
1 SPDT hermetically changeover switch			Adjustable	C			
2 SPDT hermetically changeover switch			Adjustable	W			
1 SPDT ultra sensitive changeover switch			Fix	E			
2 SPDT ultra sensitive changeover switch			Fix	F			
1 SPDT hermetically, ultra sensitive changeover switch			Fix	D			
2 SPDT hermetically, ultra sensitive changeover switch			Fix	V			
1 SPDT gold contact changeover switch			Adjustable	M			
2 SPDT gold contact changeover switch			Adjustable	K			
1 SPDT changeover switch, manual reset, opening on raising pressure			Fix	H			
1 SPDT changeover switch, manual reset, opening on falling pressure			Fix	J			
Temperature range (°C)							
-46 ... 0					400		
-20 ... 20					401		
0 ... 45					402		
40 ... 120					403		
100 ... 160					414		
20 ... 80					415		
160 ... 250					406		
70 ... 150					408		
130 ... 190					412		
200 ... 270					413		
Type of capillary							
TD1			Capillary without protection				1
TD2			Capillary with stainless steel protection				2
TD3			Capillary with stainless steel protection and PVC coating				3
Capillary length (K)							
1 meter							1
2 meters							2
3 meters							3
4 meters							4
5 meters							5
6 meters							6
7 meters							7
8 meters							8
9 meters							9
10 meters							A
11 meters							B
12 meters							C
13 meters							D
14 meters							E
15 meters							F
16 meters							G
17 meters							H
18 meters							J
19 meters							K
20 meters							L
Immersion length (P)							
Immersion length (P) = Bulb length (S) + additional stem length (A)							
P = S + 25 mm			(For S, see tables on page 4)				0
P = 150 mm			(not for TD1)				3
P = 160 mm			(not for TD1)				2
P = 250 mm			(not for TD1)				4
P = 400 mm			(not for TD1)				5
P = 600 mm			(not for TD1)				6
P = 1000 mm			(not for TD1)				D
Bulb diameter							
Ø 14 mm (standard)							E
Ø 9.5 mm							C
Process connection							
Without							0
G1/2							3
1/2 NPT							6
Options to be added behind the / (see example below)							/

Ordering example with options

RT	-	A	A	A	.	400	.	2	1	2	E	3	/	0407	-	9941
----	---	---	---	---	---	-----	---	---	---	---	---	---	---	------	---	------

